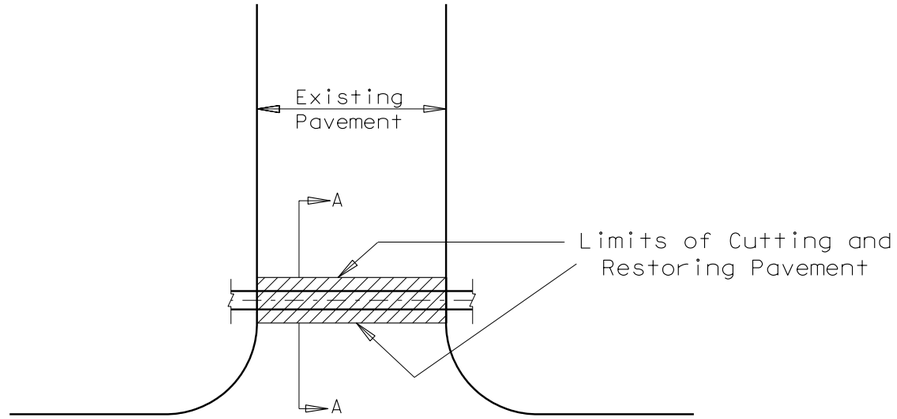

PLAN VIEW

N.T.S.

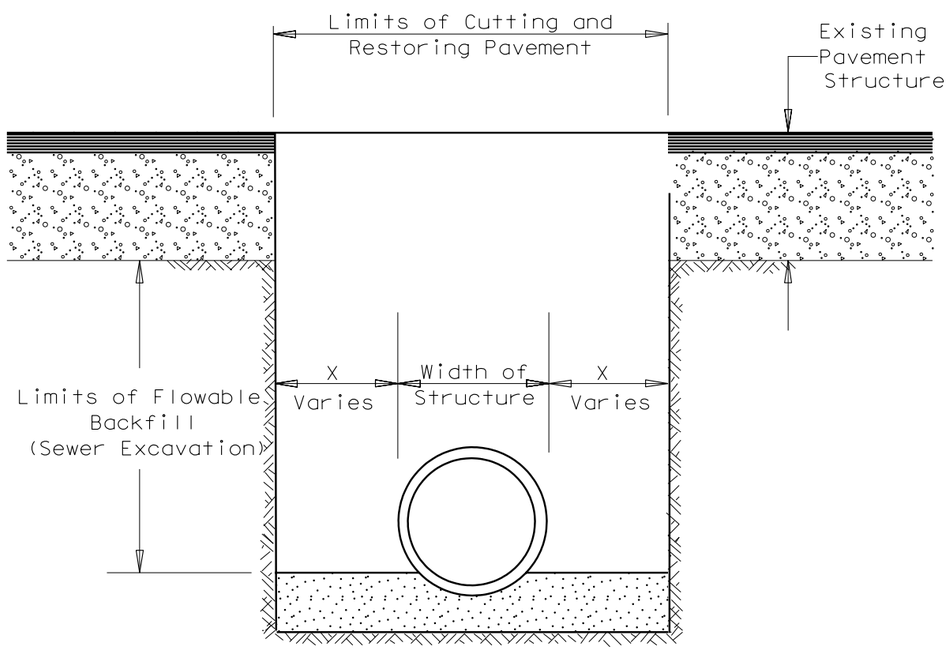

SECTION A-A

N.T.S.

TABLE OF STANDARD EXCAVATION WIDTHS FOR RC PIPE			
PIPE		X	WIDTH OF CUTTING AND RESTORING PAVEMENT
ID	OD		
18"	22 ½"	1'	3.88'
24"	29 ½"	1'	4.46'
30"	37"	1'	5.08'
36"	44"	1'	5.67'
42"	51"	1'	6.25'
48"	58"	2'	8.83'
54"	65"	2'	9.42'
60"	72"	2'	10.00'
66"	79"	2'	10.58'
72"	86"	2'	11.17'
78"	93"	2'	11.75'
84"	100"	2'	12.33'
96"	114"	2'	13.50'

Provide width of Cutting and Restoring Pavement for installation of storm drain structures as the overall width of the structure plus:

- 2 feet for structures with and inside dimension of 42" or less, or,
- 4 feet for structures with and inside dimension greater than 42".

GENERAL NOTES:

Consider any work performed to repair damage to the existing pavement outside the limits shown subsidiary to the pertinent Items.

Replacement material will be an Asphalt Stabilized paving material, Flowable Backfill or Class A Concrete as required by existing conditions or an equivalent material as directed. Ensure that the thickness of the replacement material(s) is equivalent to the thickness of the existing pavement structure.

Payment for Cutting and Restoring Pavement as shown shall be made at the unit price bid for "Cutting and Restoring Pavement."

Texas Department of Transportation
Austin District Design

CUTTING AND RESTORING PAVEMENT DETAILS

Austin District Standard

© TxDOT 2003

REVISIONS
3/03 District Update
9/04 2004 Update

DIST	FED REG	FEDERAL AID PROJECT •	SHEET
AUS	6		

COUNTY	CONTROL	SECT	JOB	HIGHWAY

FILE: CRPVMT-04.dgn