


Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Space of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Target		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	700'	770'	840'	70'	140'	800'	475'	
75	750'	825'	900'	75'	150'	900'	540'	

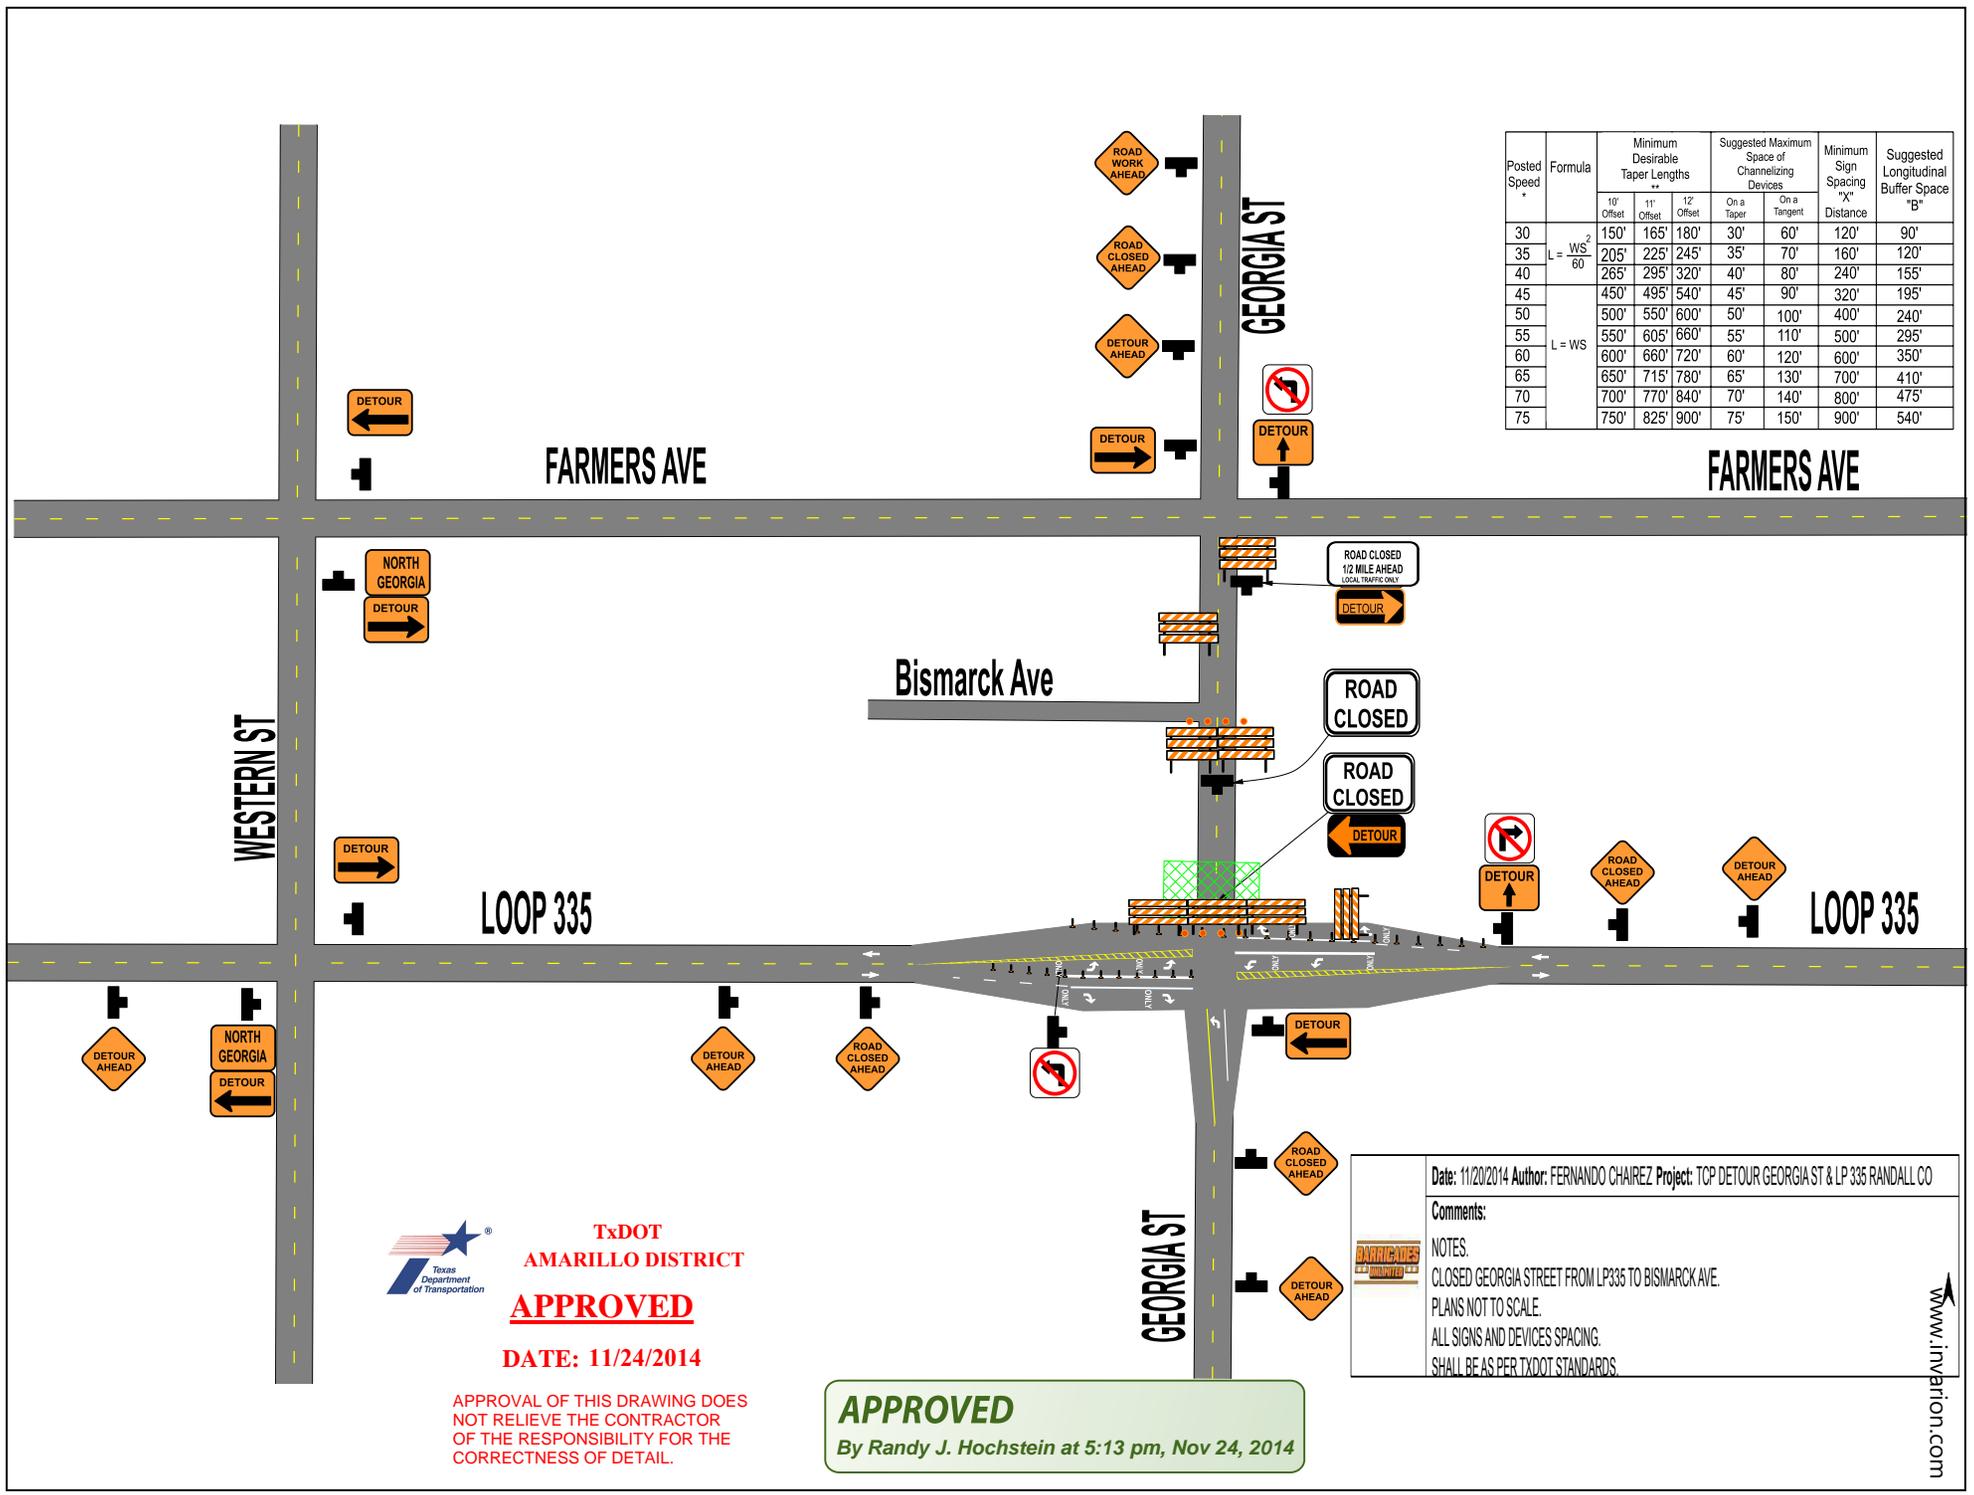


TxDOT
AMARILLO DISTRICT
APPROVED
DATE: 11/24/2014

APPROVAL OF THIS DRAWING DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY FOR THE CORRECTNESS OF DETAIL.

APPROVED
 By Randy J. Hochstein at 5:13 pm, Nov 24, 2014

Date: 11/20/2014 Author: FERNANDO CHAIREZ Project: TCP DETOUR GEORGIA ST & LP 335 RANDALL CO
 Comments:
 NOTES:
 CLOSED GEORGIA STREET FROM LP335 TO BISMARCK AVE.
 PLANS NOT TO SCALE.
 ALL SIGNS AND DEVICES SPACING SHALL BE AS PER TxDOT STANDARDS.