


(Bearing surface must be clean and free of all loose material before placing bearing pad)

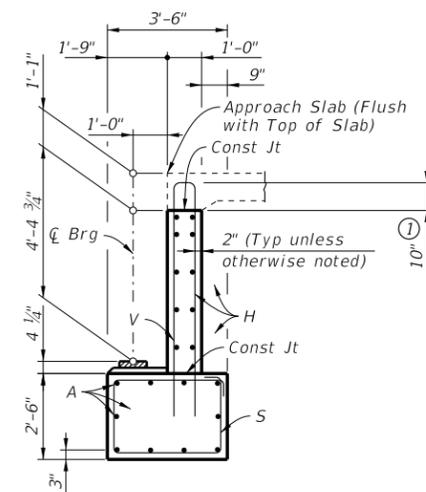

① Increase as required to maintain 3" from Finished Grade

ABUTMENT NO. 1

ROXY RIVER BRIDGE  
SB FRONTAGE RD

FILE:	DN:	CK:	DW:	CK:
©TxDOT	CONT	SECT	JOB	HIGHWAY
REVISIONS				
DIST	COUNTY		SHEET NO.	