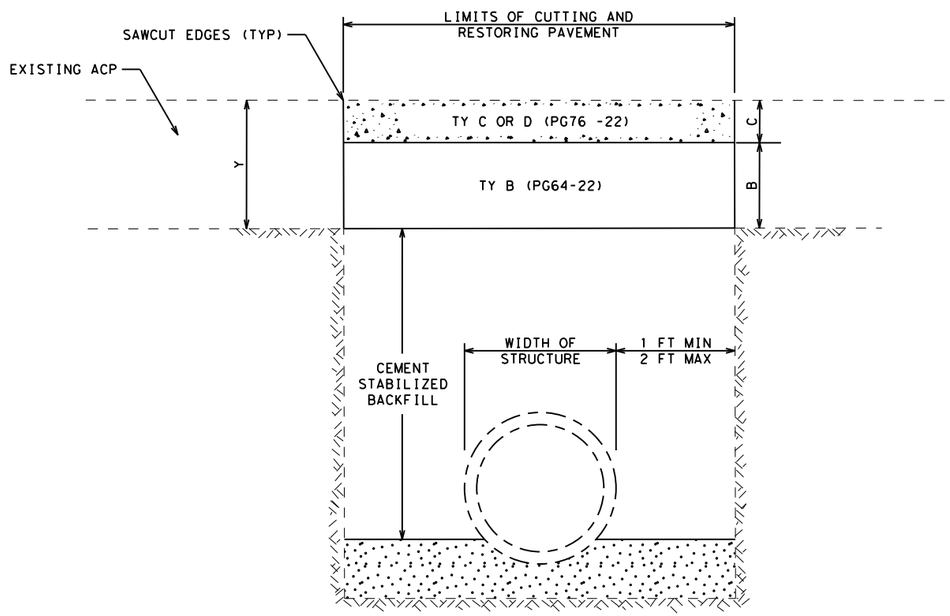

CUTTING AND RESTORING PAVEMENT DETAIL

CUT AND RESTORE NOTES

Y = DEPTH OF EXISTING ACP (IN)
Y = C + B
C = MIN 2 IN AND MAX 4 IN THICKNESS
CUTTING AND RESTORING PAVEMENT PER ITEM 400
HMA MAY BE BLADE LAID
ALL ACP PER ITEM 3076
THE FOLLOWING WORK IS SUBSIDIARY:
-CEMENT STABILIZED BACKFILL
-SAWCUT EDGES
-TACK ALL ACP SURFACES IN CUT AND RESTORE

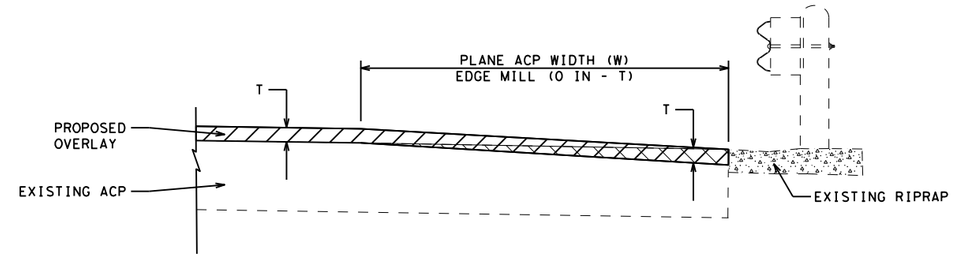

MOWSTRIP OR RIPRAP EDGE MILL DETAIL

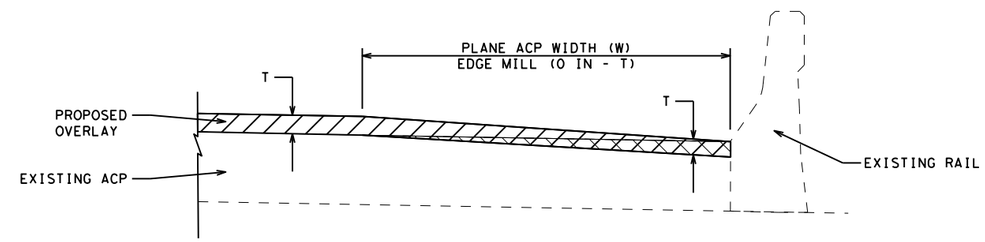

RAIL EDGE MILL DETAIL

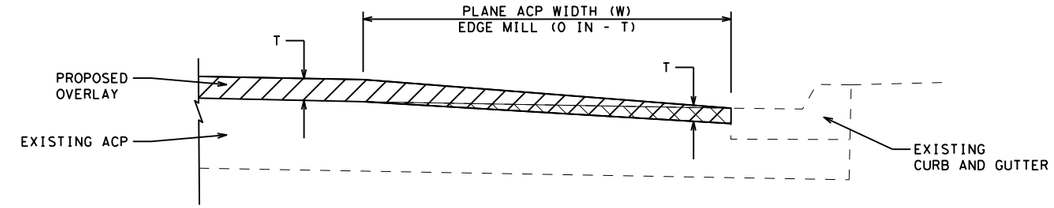

CURB EDGE MILL DETAIL

EDGE REPAIR NOTES

T = OVERLAY/INLAY THICKNESS (IN)
W = FULL LANE WIDTH OR MINIMUM 10 FT

NOT TO SCALE

Texas Department of Transportation

Austin District Standard

FLEXIBLE PAVEMENT DETAILS

FLEXPAVE(2)-22 (AUS)

©TxDOT 2022

CONT	SECT	JOB	HIGHWAY

DIST	COUNTY	SHEET NO.
AUS		

DATE: 4/27/2022 1:38:51 PM
FILE: pw:\\txdot.projectwiseonline.com:TXDOT4\Documents\14 - AUS_Standards\District Design Standards\Approved\FLEXPAVE-22(AUS).dgn