REPAIR DEPTH W/ MILLING	T = 1 IN		T = 1.5 IN		T = 2 IN	
	TY C	TY B	TY C	TY B	TY C	TY B
<= 4	4	0	4	0	4	0
5	5	0	5	0	5	0
6	6	0	6	0	6	0
7	3	4	4	3	4	3
8	4	4	4	4	4	4
>= 9	4	D-4	4	D-4	4	D-4

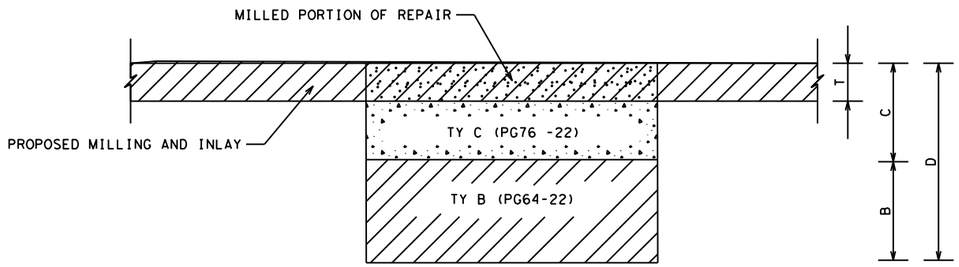

REPAIR WITH MILLING

REPAIR DEPTH W/O MILLING	TY D	TY C	TY B
2	2	0	0
3	0	3	0
4	0	4	0
5	0	5	0
6	0	6	0
7	2	0	5
8	2	0	6
>= 9	2	0	D-4

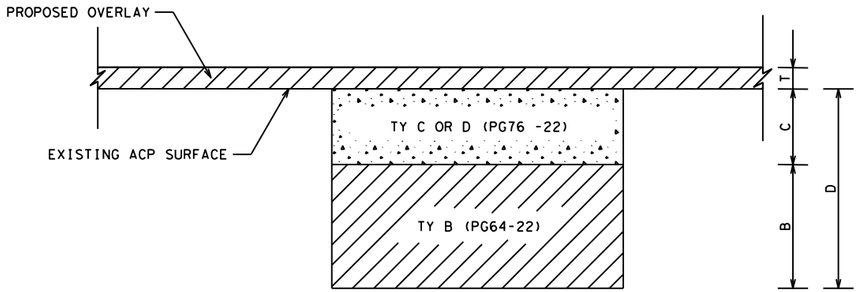

REPAIR WITHOUT MILLING

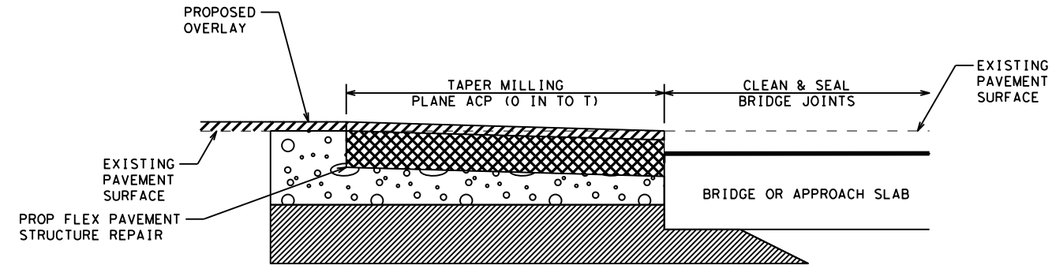

BRIDGE APPROACH/DEPARTURE TRANSITION

MATCHING EXISTING ACP ON BRIDGE

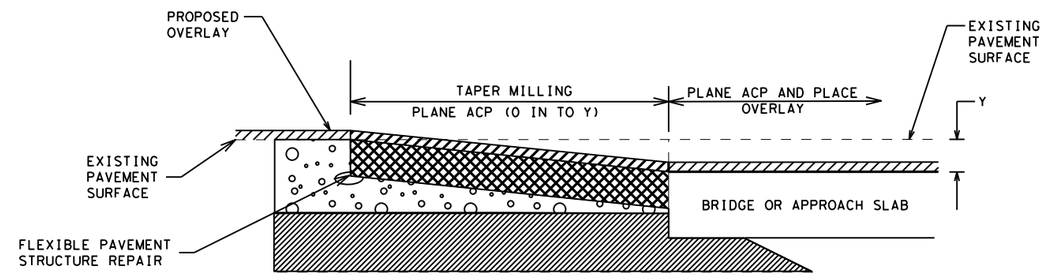

BRIDGE APPROACH/DEPARTURE TRANSITION

REMOVING EXISTING ACP ON BRIDGE

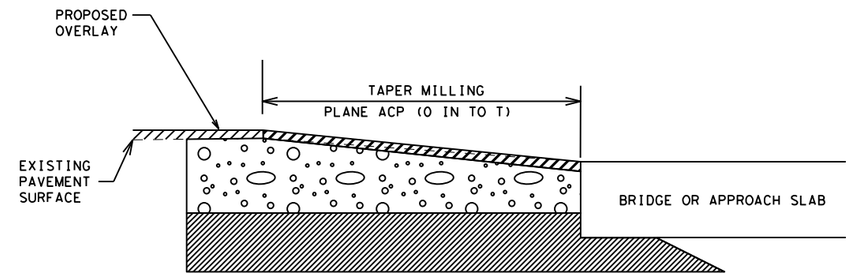

BRIDGE APPROACH/DEPARTURE TRANSITION

MATCH EXISITING BRIDGE DECK

FLEX PAV REPAIR NOTES

T = OVERLAY/INLAY THICKNESS (IN)
D = REPAIR DEPTH
C = TY C/D ACP DEPTH
B = TY B ACP DEPTH

TY B MAY BE BLADE LAID.

TY C/D MUST BE PAVER LAID.

TY C/D MAX LIFT THICKNESS 3 IN

TY B MAX LIFT THICKNESS 5 IN

ALL ACP PER ITEM 3076.

FOLLOWING WORK IS SUBSIDIARY:
-SAW CUT ALL EDGES
-TACK ALL ACP SURFACES AND LAYERS

BRIDGE APPROACH MILLING NOTES

T = OVERLAY/INLAY THICKNESS (IN)
Y = DEPTH OF MILLING ON BRIDGE

TAPER LENGTH = 100 FT PER 1 IN OF T OR Y

ENGINEER SHOULD INCLUDE WORK TO ADJUST MBGF TO MEET STANDARD HEIGHT. ADJUSTMENT TO MBGF WILL BE PAID USING APPROPRIATE BID ITEMS.

ENGINEER MUST INCLUDE WORK TO ADJUST MOWSTRIP TO ELIMINATE PONDING.

NOT TO SCALE

Texas Department of Transportation

Austin District Standard

FLEXIBLE PAVEMENT DETAILS

FLEXPAVE(3)-22 (AUS)

©TxDOT 2022

CONT	SECT	JOB	HIGHWAY

DIST	COUNTY	SHEET NO.
AUS		

DATE: 4/27/2022 1:39:10 PM
FILE: pw:\\txdot.projectwiseonline.com:TXDOT4\Documents\14 - AUS_Standards\District Design Standards\Approved\FLEXPAVE-22(AUS).dgn