


US 81/US 287 Intersection Improvement Project

Wise County, Texas

Fort Worth District

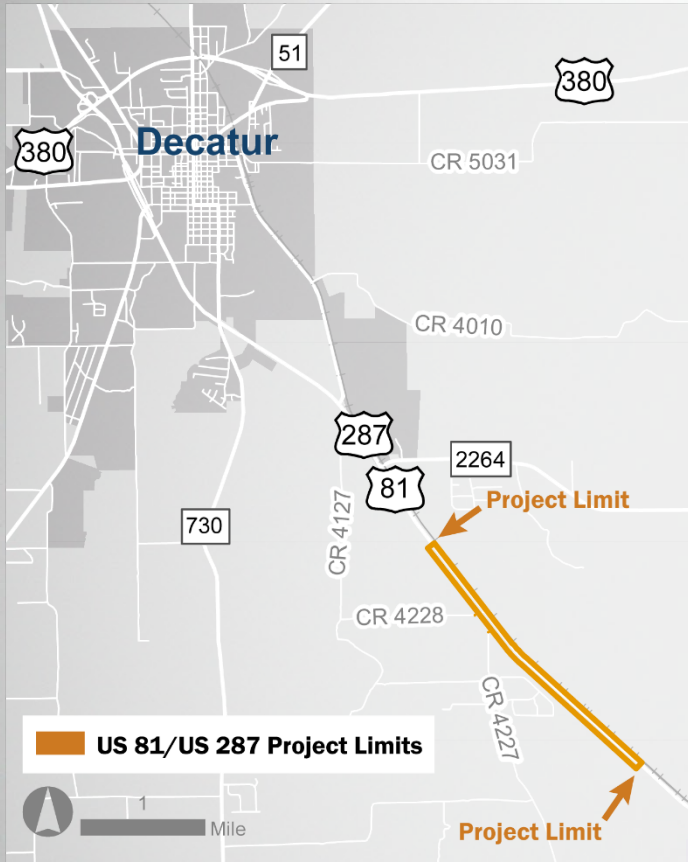

PROJECT OVERVIEW

Highway/Limits: From north of CR 4228 to south of NRS Ranch Road

Project ID: 0013-08-130

Project Length: Approximately 2.404 miles long

Description: The proposed project would include reconstruction of the US 81/US 287 mainlanes, adding ramps and one-way frontage roads, and a new grade-separated crossing at NRS Ranch Road. Proposed improvements would involve the conversion from a four-lane divided rural highway to a controlled access highway. The proposed mainlanes and one-way frontage roads each consist of two 12-foot lanes in each direction. The mainlanes would have 10-foot outside and 6-foot inside shoulders. The frontage roads would have 10-foot outside and 4-foot inside shoulders. A separate project will provide crossover improvements and add acceleration/deceleration lanes to improve safety ahead of the proposed project.

Construction Cost: The current estimated construction cost is \$42.2 million.

Right of Way: The existing right of way width is 350 feet. The proposed project is anticipated to require approximately 1.35 acres of new right of way (which includes TxDOT and county right of way). No residential or non-residential displacements are anticipated.

Contacts: Texas Department of Transportation
Fort Worth District Office
Dr. Francis A. Smith, P.E.
2501 S.W. Loop 820
Fort Worth, TX 76133
Phone: (817) 370-6708

More information www.TxDOT.gov
Search: US 81 at CR 4228
or scan this QR code



ANTICIPATED PROJECT MILESTONES

Receive Environmental Clearance: Fall 2022

Utility Coordination Complete: Spring 2024

Construction Contract Award: Pending funding

Design 100% Complete: Pending funding

Right of Way Acquisition Complete: Fall 2025

Finish Construction: Pending funding

The environmental review, consultation, and other actions required by applicable Federal environmental laws for this project are being, or have been, carried-out by TxDOT pursuant to 23 U.S. Code Section 327 and a Memorandum of Understanding dated December 9, 2019, and executed by FHWA and TxDOT.

Public Hearing | May 26, 2022
CSJ: 0013-08-130