FM 787 Trinity River Bridge Replacement

From 0.75 miles north of CR 2164A in Rayburn, TX, to CR 2151 in Romayor, TX

Liberty County, Texas

CSJ: 0813-01-110

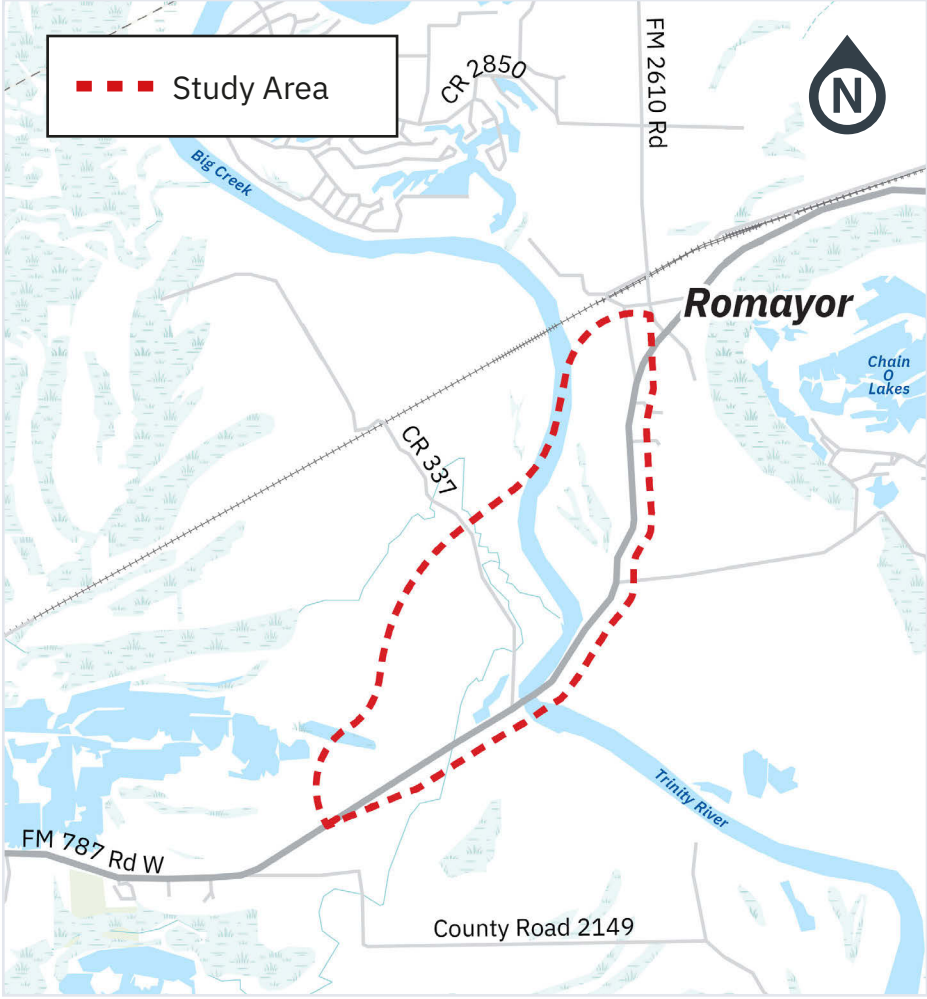

Proposed Improvements

Proposed improvements include reconstructing and realigning the FM 787 Trinity River Bridge at a new location between Rayburn and Romayor. The proposed alignment would be approximately 2 miles in length with a proposed right of way of 150 feet. The proposed pavement would have two travel lanes, one in each direction, with shoulders on each side.

Three alternative routes were presented to the public on July 1, 2026. Based on public feedback, Alternative C-B will move forward as the preferred route for the environmental study. During this study, potential safety and mobility improvements, future traffic demand based on population growth, environmental impacts, and both safety and accessibility improvements will continue to be analyzed.

Existing Typical Section

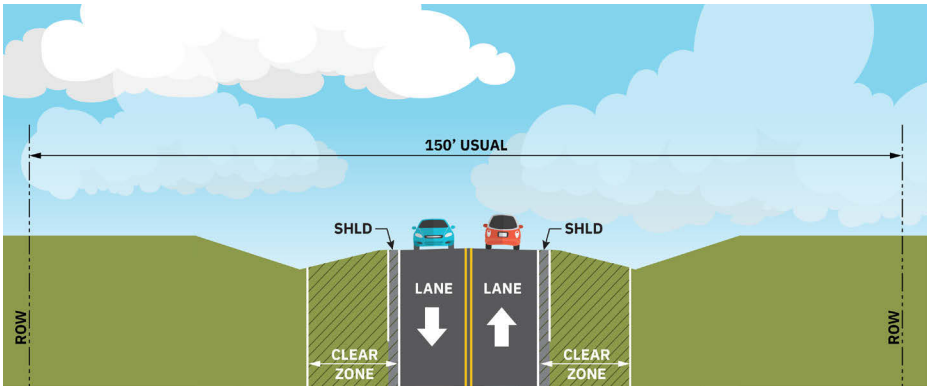

Proposed Typical Section

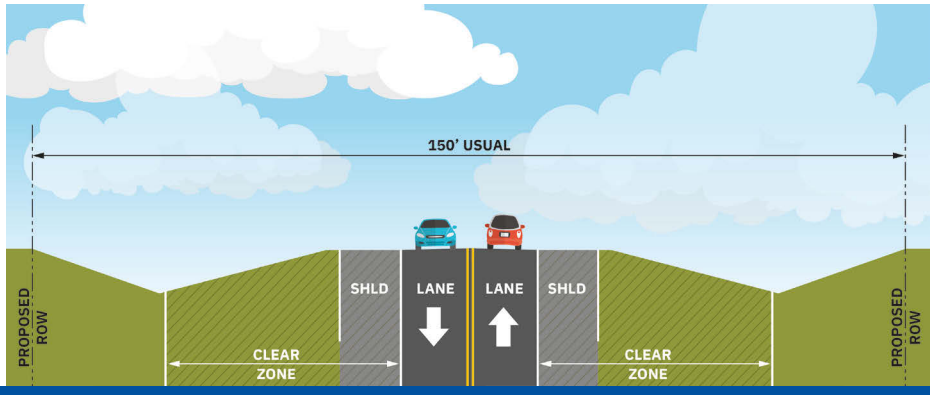

Schedule*

Ongoing Public Involvement

2025-2027
Schematic Design and Environmental Study

2027
Anticipated Environmental Decision

2027 - 2029
Detailed Design / ROW Acquisition

2029
Begin Construction

*Subject to change

Proposed Alternative C-B

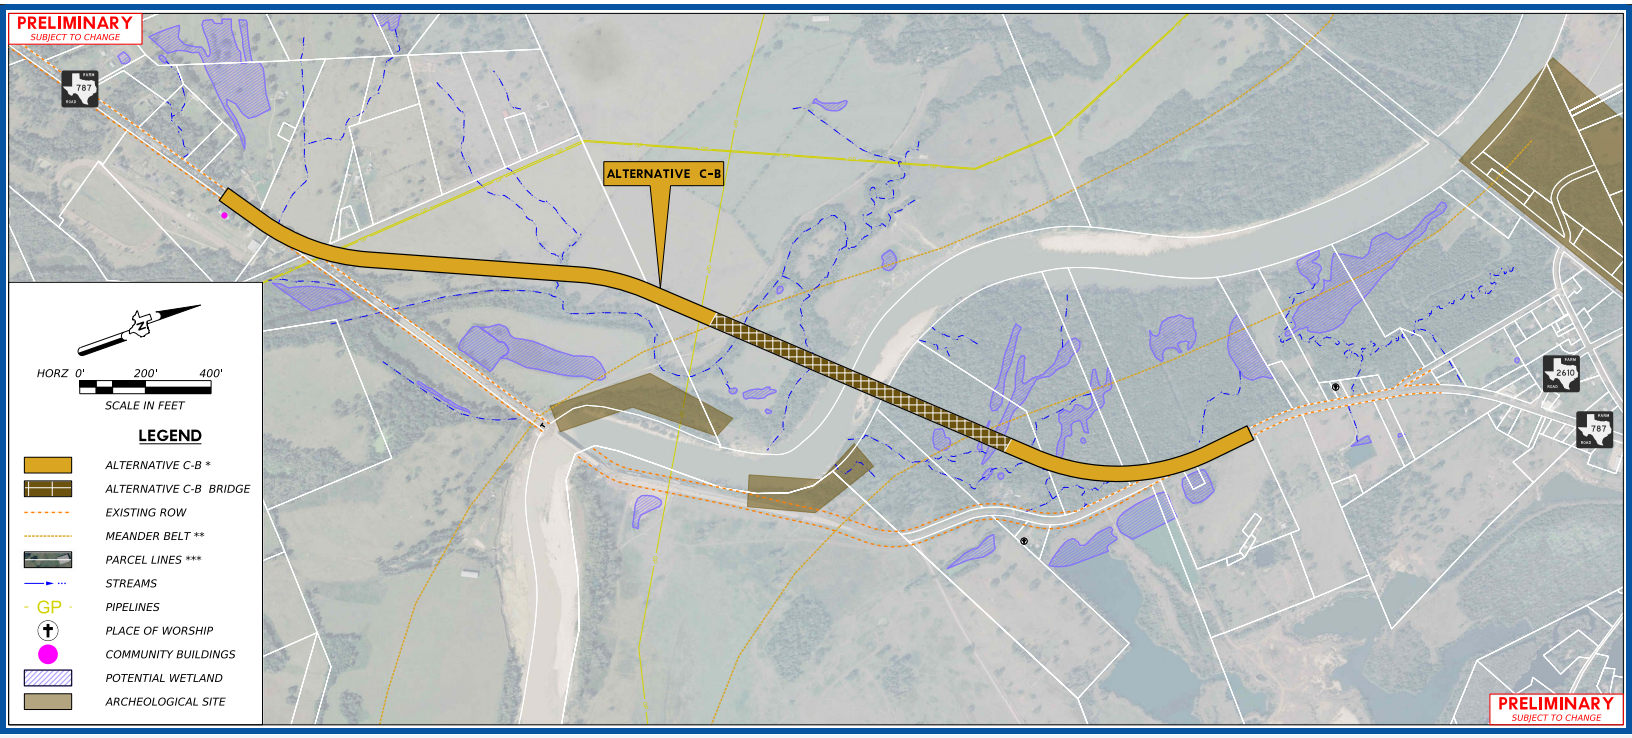

Contact Information

Chaitanya Desai
TxDOT Project Manager

409-224-6975

Chaitanya.Desai@txdot.gov