US 259 Reconstruction – SH 204 to Rusk County Line

LUFKIN DISTRICT

Project History

US 259 serves as an important roadway for rural connectivity and as an evacuation route. Construction funding was obligated in the 2020 Unified Transportation Program (UTP). The project involves reconstruction and widening of US 259 to provide a continuous two-way left turn lane and full width shoulders.

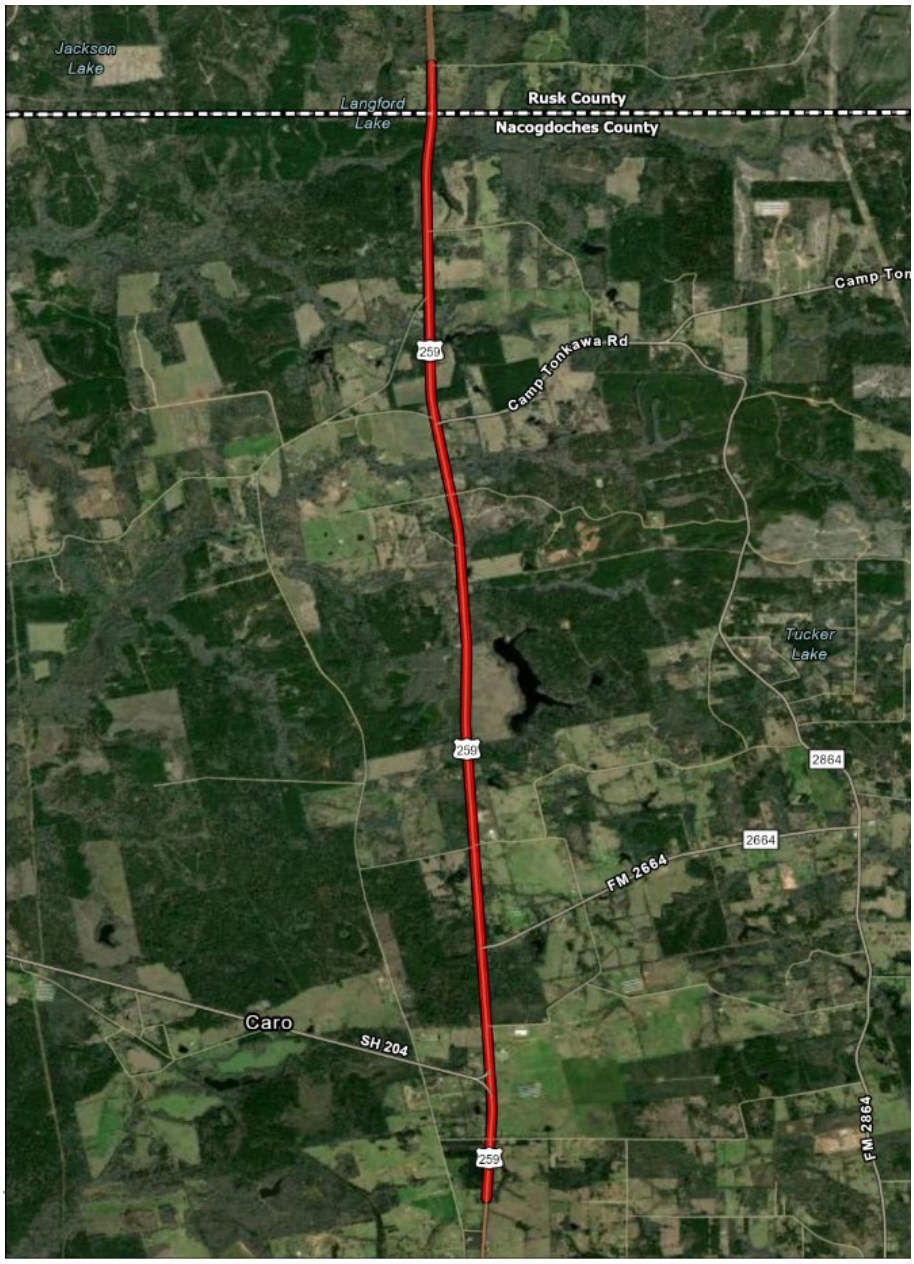

Need for Project

- This project is dedicated to improving safety and mobility due to a high number of traffic crashes.
- US 259 is a hurricane evacuation route
- US 259 is a major freight corridor
- US 259 is on National Highway System

Project Details

- **CSJ:** 0138-06-047
- **Location:** Rusk County line to 0.38 south of SH 204
- **Length:** 6.86 miles
- **Estimated Construction Cost:** $27.9 million
- **Authorized Amount:** $27.9 million
- **Funding:** Cat. 4 Rural Connectivity

Current Status

- **Eng. Studies & ENV:** Spring 2020 – Spring 2021
- **Eng. Plans, Right-Of-Way acquisition and Utility Relocations:** Spring 2021 – Spring 2024
- **Construction Letting:** March 2024

Proposed Improvements

- Reconstruct and widen US 259
  - Add 16-foot continuous two-way left turn lane
  - Add 10-foot shoulders
- Add acceleration lane along southbound US 259 south of SH 204

Project Goals

- Improve safety
- Reduce congestion and improve mobility
- Facilitate hurricane evacuation route
- Enhance freight mobility

Contact Information:

Kelly Morris, P.E.
Lufkin TP&D
(936)633-4349
Kelly.Morris@txdot.gov

Jimmy Thompson, P.E.
Lufkin Adv. Planning Engineer
(936)633-4397
Jimmy.Thompson@txdot.gov